


3" GAS VALVE



713-7100-3-G

Pressure: 10-600#

Volume: to 7421 CFM

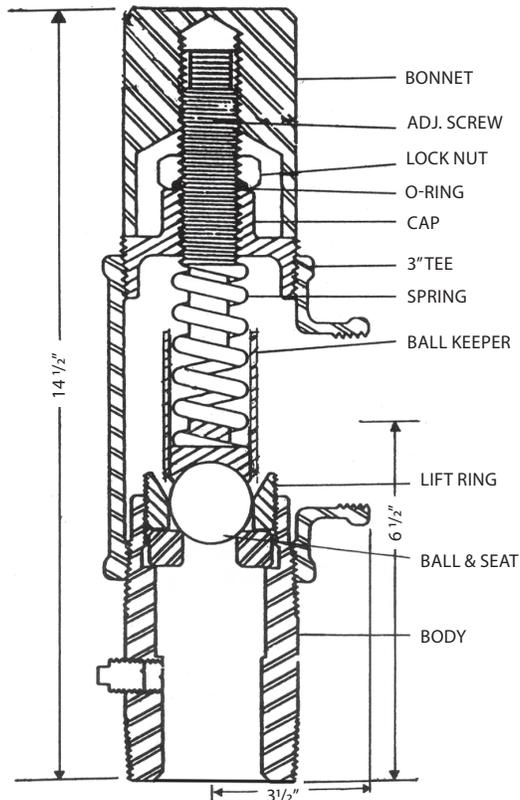

INLET AVAILABLE: Male NPT 3"

OUTLET: Female NPT 3"

TEMPERATURE RANGE: -20° to +300°F

BODY: DUCTILE IRON — Standard

TRIM: Stainless Steel

**A METAL-TO-METAL SEAL
INSURES LONG RUNS. VALVE
COMPLETE WITH TAMPER-PROOF
BONNET AND WIRE SEAL**

APPLICATION: Recommended for overpressure protection on separators, compressor tanks, heater-treaters, gathering lines, transmission systems, meter runs, gas manifolds, refinery service and other gas systems.

FIELD REPAIRS AND PRESSURE SETTING ADJUSTMENTS ARE EASILY MADE ON-SITE WITHOUT SPECIAL TOOLS.

| DUCTILE IRON PART NUMBER | WORKING PRESSURE RANGE | CFM OF AIR AT MAXIMUM SETTING +10% |
|--------------------------|------------------------|------------------------------------|
| 713-7100-3-G-25 | 10 - 25# | 25# = 464 CFM |
| 713-7100-3-G-75 | 25 - 75# | 75# = 1069 CFM |
| 713-7100-3-G-125 | 75 - 125# | 125# = 1674 CFM |
| 713-7100-3-G-175 | 125 - 175# | 175# = 2279 CFM |
| 713-7100-3-G-225 | 175 - 225# | 225# = 2884 CFM |
| 713-7100-3-G-275 | 225 - 275# | 275# = 3489 CFM |
| 713-7100-3-G-350 | 275- 350# | 350# = 4396 CFM |
| 713-7100-3-G-600 | 350 - 600# | 600# = 7421 CFM |