

2" LIQUID RELIEF VALVE



762-7601-2


High Pressure

Pressure Control

High Volume

To ---- 18,000#

To ---- 210 GPM

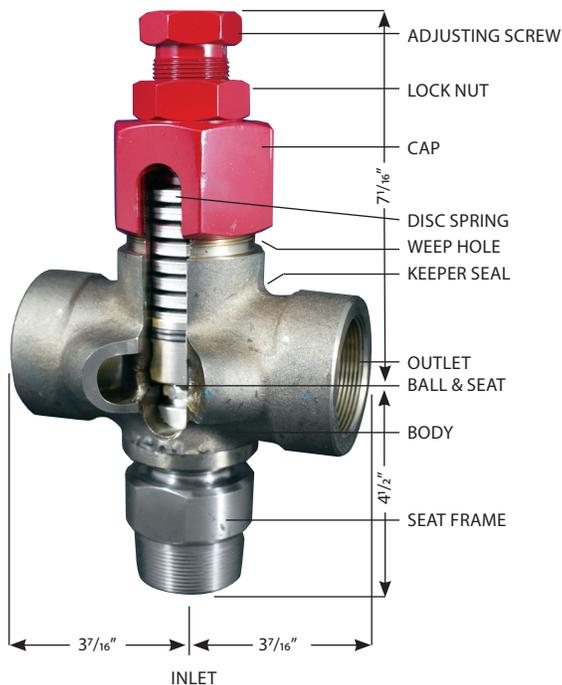

Designed for protection against over-pressure for vessels, pumps, lines, etc. It is a rugged and versatile valve capable of handling a wide range of pressures.

Body: 2" Aluminum-Bronze or 316SS

Ball & Seat: Sheralloy® Assembly (Cobalt Base Alloy)

Spring: Disc Spring

Inlet: 2" Male NPT, 1-1/2" Male NPT or Victaulic

Outlet: Dual - 2" Female NPT or Victaulic

Weep Hole: Any flow from weep hole indicates keeper seal is worn and should be replaced.

USE ONLY AS DIRECTED

Do not deviate from Manufacturer's recommended pressure range and mode of installation

ALUMINUM-BRONZE PART NUMBER	WORKING PRESSURE RANGE	VOLUME (GPM) AT 25% OVER SET PRESSURE	SPRING ARRANGEMENT AND QUANTITY	SEAT ORIFICE DIAMETER	CAP COLOR CODE
762-7601-2 -LLP	100-600#	35-140	Thin 1 X 1 (19)	1-1/8"	White
762-7601-2 -LP	400-1500#	30-180	Reg 1 X 1 (15)	1-1/8"	Yellow
762-7601-2 -MP	800-4000#	35-210	Reg 2 X 2 (18)	1-1/8"	Green
762-7601-2 -HP	1000-8000#	Not Verified	Reg 3 X 3 (18)	1-1/8"	Red
762-7601-2 -XHP	2500-10000#	Not Verified	Reg 3 X 3 (18)	3/4"	Black
762-7601-2 -SHP	2500-12000#	Not Verified	Reg 3 X 3 (18)	3/4"	Brown
762-7601-2 -UHP	3000-18000#	Not Verified	Reg 3 X 3 (18)	1/2"	Tan

MATERIAL SPECIFICATIONS:

- Standard valve is Aluminum-Bronze valve.
- Add "316" to part number for 316 Stainless Steel valve.

Method of Installation →

